












www.ecodepur.pt

LAMELLAR SLUDGE TRAP ECODEPUR® DEKTECH 6

TECHNICAL INFORMATION

The Lamellar Sludge Trap ECODEPUR® DEKTECH 6 are mainly used to remove precipitable substances from water polluted with light free floating liquids such as engine oils, gas, before a Light Liquid Separator

EQUIPMENT IDENTIFICATION	Lamellar Sludge Trap			
MARCA	ECODEPUR®			
TYPE	DEKTECH 6			
TYPE OF TREATMENT	Primary treatment			
MATERIAL	Polyethylene			
LAMELLAR FILTER				
Material	Polypropylene			
Projection of the Sedimentation area	240 m ² / m ³			
Distance between lamellas	12 mm			
VENTE POINT	Included (11/2")			
COVER	Included			

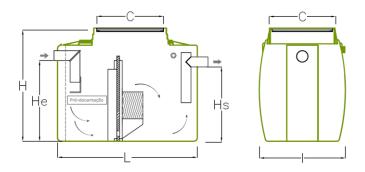

TYF	PE .	VOLUME (I)	L (mm)	l (mm)	H (mm)	He (mm)	Hs (mm)	C (mm)	Ø PIPE (mm)	WEIGHT (kg)
DEKTE	CH 6	1.360	1.560	960	1.230	930	820	750 X 750	110	100











