



LIGHT LIQUID SEPARATOR ECODEPUR® TECHNOIL® NS350

TECHNICAL INFORMATION


ECODEPUR® TECHNOIL® is Light Liquid Separator destined to clean water polluted with light free floating liquids such as engine oils, gas, oil etc, Class 1 in according of EN 858, with double coalescent cell and automatic closure device.



ECODEPUR® TECHNOIL® Separators has CE marking, in accordance with the legal obligations that stems from the entry into force of the Regulation (UE) N.° 305/2011 of Construction Products, fulfilling all the requisites of the European Standard EN 858-1:2002.

EUROPEAN STANDARD	EN 858-1					
EQUIPMENT IDENTIFICATION	Light Liquid Separator					
MARCA	ECODEPUR [®]					
ТҮРЕ	TECHNOIL® NS350					
CLASS EN 858-1	Class 1 (<5,0 mg "Mineral Oils"/l ⁽¹⁾)					
NOMINAL SIZE	350 I/s					
COALESCENT CELL	Lamellar					
AUTOMATIC CLOSURE DEVICE	Included (system always calibrated)					
VOLUME PRE-SLUDGE TRAP	35.000 I					
OIL STORAGE	35.000					
FIRE CLASS REACTION	F					
MATERIAL	Polyethylene					
VENTE POINT	Included (1 ^{1/2} ")					
COVER	Polyethylene					

⁽¹⁾ Teste conditions EN 858-1

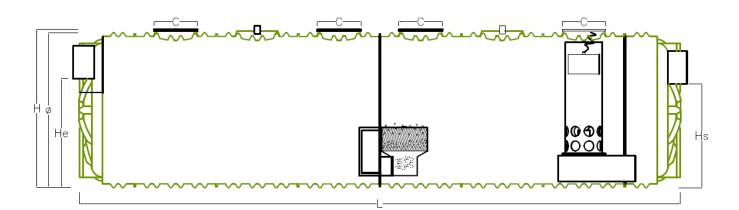

ТҮРЕ	NS (l/s)	VOLUME (I)	Ø (mm)	L (mm)	H (mm)	He (mm)	Hs (mm)	C (mm)	Ø PIPE (mm)	WEIGHT (kg)
TECHNOIL® NS350	350	70.000	2.980	11.560	3.050	2.060	1.960	790	630	3.150

Rev.1_02.03.16 | The pictures and dimensions can be changed without notice.



t **T.** +351 249 571 500 **F.** +351 249 571 501 Z. I. Casal dos Frades, 68 2435-661 Seiça - Ourém

